


Contract Tipper Range

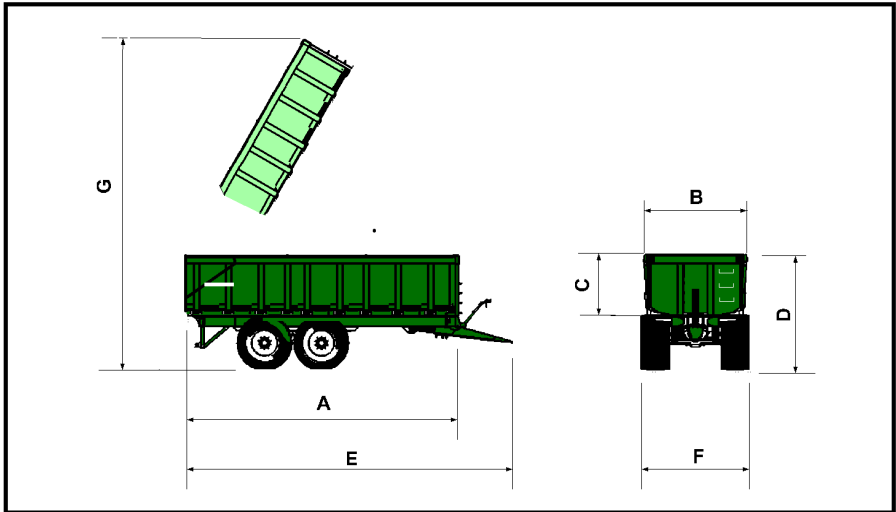

Model			CT8	CT10	CT12	CT14	CT17	CT20
Dimensions								
Body Length	A	m	3.70	4.00	4.50	5.00	5.50	6.00
		ft	12'2"	13'1"	14'9"	16'5"	18'0"	19'8"
Body Width	B	m	2.50	2.50	2.50	2.50	2.50	2.50
		ft	8'2"	8'2"	8'2"	8'2"	8'2"	8'2"
Body Height	C	m	0.60	0.70	0.75	0.90	1.00	1.00
		ft	2'0"	2'4"	2'6"	2'11"	3'3"	3'3"
Loading Height	D	m	1.65	1.75	1.95	2.10	2.35	2.35
		ft	5'5"	5'9"	6'5"	6'11"	7'9"	7'9"
Overall Length	E	m	5.25	5.55	6.05	6.55	7.05	7.55
		ft	17'3"	18'3"	19'10"	21'6"	23'2"	24'9"
Overall Width	F	m	2.64	2.64	2.64	2.64	2.64	2.64
		ft	8'8"	8'8"	8'8"	8'8"	8'8"	8'8"
Tipped Height	G	m	4.77	4.96	5.18	5.77	6.48	6.96
		ft	15'8"	16'3"	17'0"	18'11"	21'4"	22'10"
Capacities								
Capacity		m ³	5.41	6.82	7.90	9.87	12.19	13.40
		ft ³	191	241	279	349	430	473
Hydraulic Oil		lt	24.6	24.6	40.0	40.0	40.0	48.8
		Gal	5.3	5.3	8.6	8.6	8.6	10.5
Weights								
Unladen Weight		kg	3500	4164	4464	5400	5800	6750
Misc								
Number of Axles			2					
Axle Beam Size			80	127 (COM)				
Brake Size			350X90	406X120			420X180	
Brake Option			H	H/A	H/A	H/A	H/A	H/A
Tyre Size			340/65 R18		385/65 R22.5			445/65 R22.5
Bottom Chassis			200 X 100 RHS		250 X 100 RHS		300 X 150 RHS	
Top Chassis			150 X 75 RHS			150 X 100 RHS		