

Beavertail Low Loaders are available in 15 & 20 tonnes and are mounted on a tandem or tri-axle springs.

Features include: hydraulic 900 mm wide angle iron loading ramps, 38 mm hardwood planed floor, fully road legal lights, heavy-duty axles and wheels are standard. All models are 2500 mm overall width, and a deck height of 900 mm with addition of outriggers if required.

STANDARD FEATURES

- Independent hydraulic brakes
- Low 20 B/T air brakes and load sensing
- **▼** Parking brakes
- Heavy-duty EN8 towing eye
- Commercial axles
- 215/75x17.5 twins
- 1500 mm Beavertail
- Hydraulic loading ramps
- **▼** Hardwood floor
- **▼** Skid & skid carrier
- **▼** LED lights

- **Number** plate holder
- Mudguards and flaps
- LED beacon
- Lashing rings in floor
- Strap points
- Toolbox (x2)
- Anti-chip paint on headboard
- 900mm Deck height
- Sprung drawbar
- Angle iron loading ramps
- ▼ Colour coded pipes










BEAVERTAIL LOW LOADER



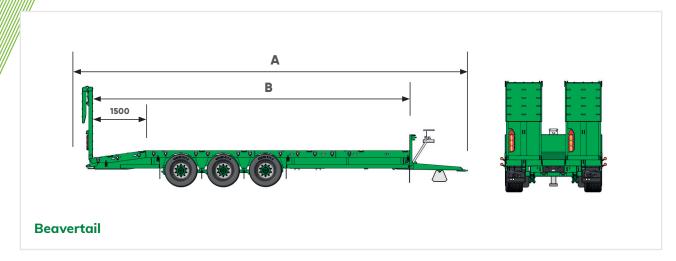

Model	Length mm	Body length B mm	Body width mm	Number of axles	Axle beam mm/studs	Brake size	Brakes	Tyre size	Chassis
LOW 15 B/T	5500 + 1500 Beavertail	7000	2500	2	2xcom/10	310×190	Hydraulic Brakes	215x75 Twins	300×150 RHS
	6500 + 1500 Beavertail	8000	2500						
	7500 + 1500 Beavertail	9000	2500						
	8500 + 1500 Beavertail	10,000	2500						
LOW 20 B/T	6500 + 1500 Beavertail	8000	2500	3	3xcom/10	310x190	Air Brakes	215x75 Twins	300x150 RHS
	7500 + 1500 Beavertail	9000	2500						
	8500 + 1500 Beavertail	10,000	2500						
	9500 + 1500 Beavertail	11,000	2500						
	10500 + 1500 Beavertail	12,000	2500						
	11500 + 1500 Beavertail	13,000	2500						

BAILEY TRAILERS LIMITED

Pride Parkway, Sleaford, Lincolnshire NG34 8GL

