EJECTOR

WHEN YOU WANT TO MOVE MORE ...

Ejector trailers offer a safe and efficient solution to farmers and contractors who are looking to increase transportable volumes.

Our Ejector trailer is unique. By fitting larger rams we've increased the height clearance between the tail door and the trailer, which allows heaped loads to be ejected more easily.

We build our Ejector trailers as fully welded constructions. A rectangular hollow section chassis provides optimum strength with heavy-gauge sides, strengthening channels and heavy-gauge floors.

A 32 tonne suspension permits high hauling speeds in tough conditions, whilst stability is provided by the multi-leaf draw bar spring, which cushions the ride across all terrains.

Standard features

Hydraulic and air brakes, LED lights, sprung drawbar, hydraulic door, full front window, LED beacon, skid & skid carrier, mudguards and flaps, extra top lights on tail door, 560/60 R22.5 BKT wheel assemblies.












EJECTOR

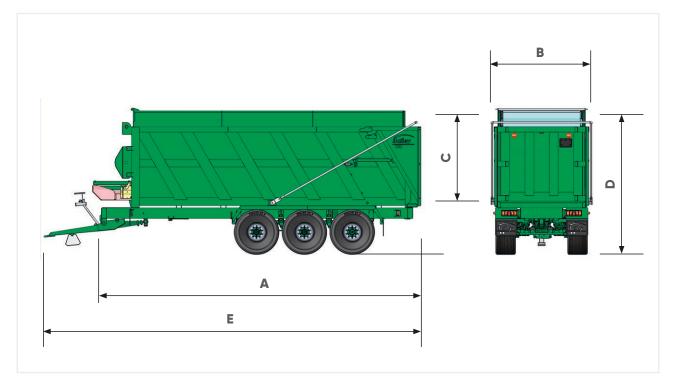

| Model | | EJECTOR 18 | EJECTOR 22 TRI |
|-----------------|----------------|--------------|----------------|
| Dimensions | | | |
| Body length | A mm | 6700 | 8000 |
| Body width | B mm | 2500 | 2500 |
| Body height | C mm | 2100 | 2100 |
| Loading height | D mm | 3500 | 3500 |
| Overall length | E mm | 8500 | 9800 |
| Body capacity | m ³ | 34 | 40 |
| Hydraulic oil | L | 30 | 35 |
| Number of axles | | 2 | 3 |
| Axle beam | mm/studs | com/10 | com/10 |
| Brake size | | 420x180 | 420×180 |
| Brake option | | H/A | H/A |
| Suspension | | 3 leaf 32 T | 3 leaf 48 T |
| Sprung d/bar | | STD | STD |
| Tyre size | | 385/65 R22.5 | 385/65 R22.5 |
| Bottom chassis | | 250x150 RHS | 250x150 RHS |

BAILEY TRAILERS LIMITED

Pride Parkway, Sleaford, Lincolnshire NG34 8GL Selection (a) 1529 303411 (a) sales@baileytrailers.co.uk (b) baileytrailers.co.uk